

# Creative TerraTex Paint

Cement Based Colour Texture Coating

## DESCRIPTION

**Creative TerraTex Paint** cement-based colour textured coating material is a decorative coating made from white cement, mineral fillers, various adhesive, water proof chemical and pigments. It provides a durable, weather-resistant, and textured finish for interior and exterior walls, offering good adhesion, breathability, and long-lasting colour.

## SCOPE OF USE

It is suitable for interior and exterior wall surfaces, concrete, plaster, and masonry. Ideal for residential, commercial, and industrial buildings to achieve decorative, durable, and weather-resistant textured finishes.



## TYPICAL PROPERTIES at 25°C

| PROPERTY             | TEST METHOD | VALUE                                                                                                                        |
|----------------------|-------------|------------------------------------------------------------------------------------------------------------------------------|
| Composition          |             | White portland cement, marble chips, hydrated lime, various cellulose powders, colour pigment, and chemical improving agents |
| Appearance           |             | Colours powder                                                                                                               |
| Mixing Ratio         |             | 5/6 kg of water for 25 kg bag                                                                                                |
| Compressive Strength |             | 6N/mm <sup>2</sup> @ 28 bags                                                                                                 |
| Flexural Strength    |             | 1 N/mm <sup>2</sup> @ 28 days                                                                                                |
| Working time         |             | Approx 45/50 minutes                                                                                                         |
| Specification        |             | BS EN 998-1<br>BS EN 13914-2                                                                                                 |

## KEY ADVANTAGES

- Durable and weather-resistant.
- Provides attractive textured/Terratex finish.
- Good adhesion on concrete, plaster, and masonry.
- Breathable, preventing moisture buildup.
- UV and fungal resistant.
- Long-lasting colour retention.

## SURFACE PREPARATION

Surface must be cementitious and clean from dust, oil loose particles. Repair cracks and uneven areas with any dampness before application.



## MIXING

Pre-mix texture paint powder with clean water as per requirements, depends on the surface condition & environment. Use slow-speed drill mixer for uniform consistency and creamy paste

## APPLICATION

The surface should be wetted prior to material application. But water will not accumulate anywhere. The water-mix creamy past apply prepair cementitious surface. 1st coat with plastic trowel/roller to desired thickness (2-3mm) create texture by roller, trowel or pattern tools.

## CURING

Cement-based colour texture paint curing is usually not required. Better, Water spray may be done once/twice after 12/24 hours, if applied in hot, dry, or windy weather, to prevent surface shrinkage.

## GENERAL INFORMATION

### Shelf Life

12 months from date of manufacture when stored under warehouse conditions in original unopened packing.  
Extreme temperature / humidity may reduce shelf life.

### Cleaning

Clean all equipment and tools with water immediately after use.

## HEALTH AND SAFETY

### PPE's

Gloves, goggles and suitable mask must be worn.

### Precautions

Contact with skin, eyes etc. must be avoided. If swallowed seek medical attention immediately.

### Hazard



Regarded as non-hazardous for transportation.

### Disposal

Do not reuse containers. To be disposed of as per local rules and regulations.

### Additional Information

Refer MSDS. (Available on request)

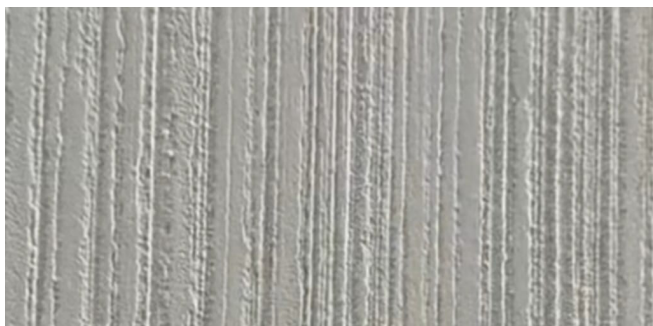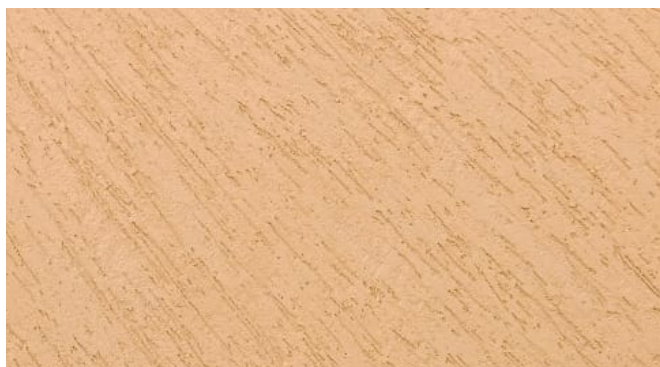

**Creative Chemical Vietnam Co. Ltd.**

No-15, Street-10A, Bien Hoa Industrial Zone 1, Bien Hoa City, Dong Nai, Vietnam  
Phone: (+84) 251 8877 400, (+84) 61 3836 125, Email: [info@creativechemical.net](mailto:info@creativechemical.net), Web: [creativechemical.net](http://creativechemical.net)

Creative Chemical products are produced with ISO 9001:2015 standard terms and conditions. So it's customer responsibility to maintain and follow up the TDS and weather forecast carefully. We can not guarantee the application and end use as it depends on various conditions and weather.